

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 7 TOWNSHIP 15 RANGE 3

DATE: 6-22-06

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 5-4-00

IN. S.P.C. E ZONE NAD '83

NAME: 15030701

N: 501608.7459(m)

E: 49990.0574(m)

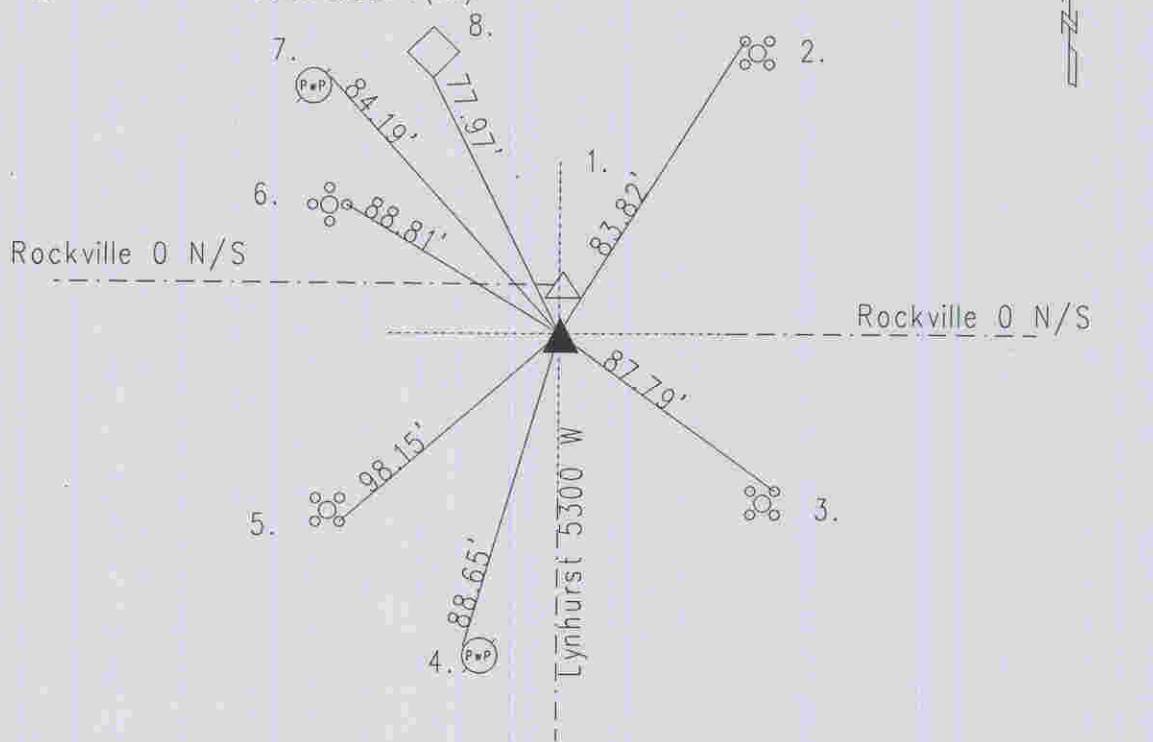

Original post set 1820 by Wm. Laughlin with witness: 10" hickory N 17 W 27 links; 18" beech S 55 W 25 links per Marion County Atlas pg. 6. Mayhew 6-2-1859 called rock but set no witness. 12-15-1957 Schultz called steel pin. 3-10-58 called same. Wilcoxon 7-15-77 called road nail. Green 11-14-86 called same. Kiste 9-19-90 excavated and set Harrison per Rockville Road construction project. Re-tied by Wilcoxon 11-25-96. Re-tied by Wilcoxon 7-11-9. Re-tied 6-22-06 by Wilcoxon. 15030701

REF.	DISTANCE	DESCRIPTION
1.	5.40'	Due N to Harrison NE corner of 12-15-2
2.	83.82'	Cut 'x' NW bolt of aluminum pole base
3.	87.79'	Cut 'x' NE bolt of aluminum pole base
4.	88.65'	PK nail NW PwP no# 8"up
5.	98.15'	Cut 'x' SE bolt of aluminum pole base
6.	88.81'	Cut 'x' E bolt of aluminum pole base
7.	84.19'	Mag nail w/bw NE PwP#29-525A 12"up
8.	77.97'	Cut 'x' southerly corner of concrete signal box